

APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE ACCORDING TO ECE
REGULATION No. 30, 02 SERIES OF AMENDMENTS

1. Manufacturer's name or trade mark(s) on the tyre type⁽²⁾ : SAILUN
2. Tyre type designation by the manufacturer⁽²⁾ : ATREZZO ECO
3. Manufacturer's name and address : Sailun Group Co., Ltd.
West of Jiangshan Middle Road,
Economic & Technological Development District,
(Hi-tech Industrial Park),
QINGDAO,
P.R. China
4. If applicable, name and address of the manufacturer's representative : N.A.
5. Summarized description
 - 5.1. Tyre size designation : 165/70R13
 - 5.2. Category of use : normal/~~snow~~/special use/temporary use⁽¹⁾
 - 5.3. Structure : ~~diagonal/bias belted~~/radial/~~run flat~~ tyre⁽¹⁾
 - 5.4. Speed category symbol : T
 - 5.5. Load-capacity index : 79
6. Overall dimensions : ETRTO/~~calculated~~/Annex 5
 - overall section width : 170
 - outer diameter : 562
7. Factor 'x' : 0.70
8. Rims on which the tyre can be mounted : 5.0B x13
9. Measuring rim and test rim : See attached test report
10. State whether the tyre is : Tubeless /~~tube type~~
11. State whether the tyre is : Standard / ~~reinforced~~
12. State if special use tyre : n.a.
 - Professional Off-Road : ~~Yes~~ / no
 - Tread depth : n.a.
 - Void to fill ratio : n.a.
13. Submitted for approval on (date) : Aug. 25, 2015

We herewith declare that we have not applied and will not apply for approval with another Contracting Party of the ECE for the same type of product.

MANUFACTURER'S STAMP

Signature :

.....*Gao Min*.....

Name: Gao Min

THIS APPLICATION IS ACCOMPANIED BY:

- A drawing of the tyre's side wall, tread and dimensioned cross section.
- The test report.

(1) Strike out what does not apply.
(2) Modified points are underlined for extension.



THE NETHERLANDS
(N E D E R L A N D)

COMMUNICATION

Concerning ⁽¹⁾:

- approval granted
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of pneumatic tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-0284634**Extension number: 00**

1. Manufacturer's name or trade mark(s) on the tyre type : SAILUN
2. Tyre type designation by the manufacturer : ATREZZO ECO
3. Manufacturer's name and address : Sailun Group Co., Ltd.
West of Jiangshan Middle Road, Economic & Technological Development District, (Hi-tech Industrial Park), QINGDAO, China
4. If applicable, name and address of the manufacturer's representative : not applicable
5. Summarised description
 - 5.1. Tyre size designation : 165/70R13
 - 5.2. Category of use : normal/~~snow/special use/temporary use~~ ⁽¹⁾
 - 5.3. Structure : ~~diagonal/bias-belted~~/radial/~~run-flat tyre~~ ⁽¹⁾
 - 5.4. Speed category symbol : T
 - 5.5. Load-capacity index : 79
6. Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : TÜV Rheinland Kraftfahrt GmbH
Technologiezentrum Verkehrssicherheit
Typprüfstelle Fahrzeuge/Fahrzeugteile
Am Grauen Stein
D-51105 Köln (Poll)



7. Date of report issued by that service : Sep. 16, 2015
8. Number of report issued by that service : 86-R30-1233/15-00
9. Reason(s) of extension (if applicable) : Not applicable
10. Any remarks : ---
11. Approval : granted/~~extended/refused/withdrawn~~⁽¹⁾
12. Place : Zoetermeer
13. Date : 17-NOV-2015
14. Signature :




L. Vellekoop

15. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.
 - The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
 - The test report as mentioned in item 8.


⁽¹⁾ Strike out what does not apply.

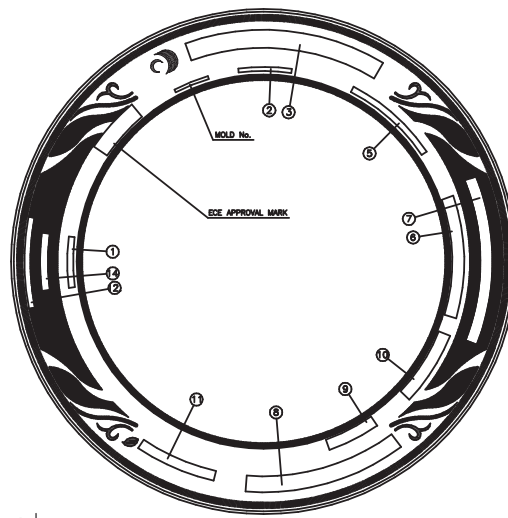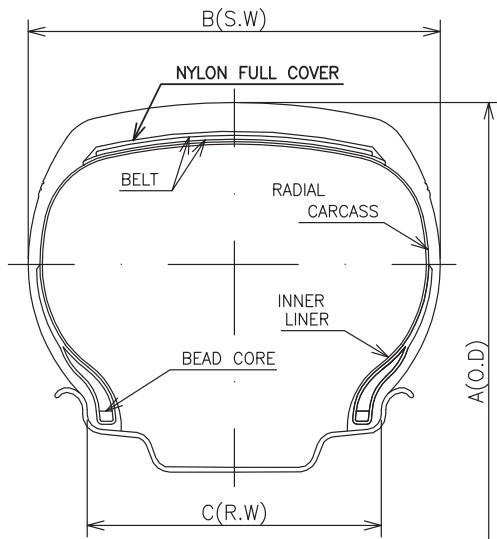

UPPER

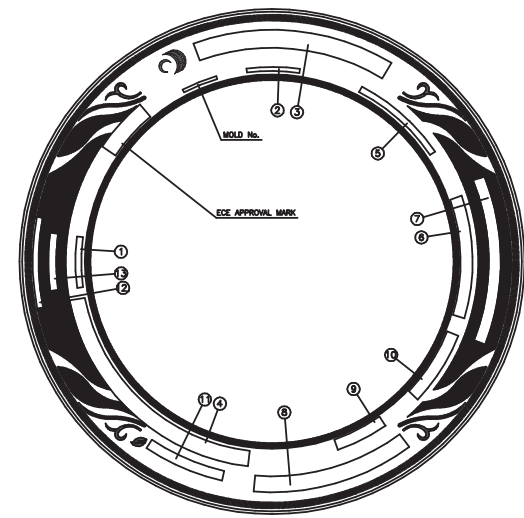

LOWER

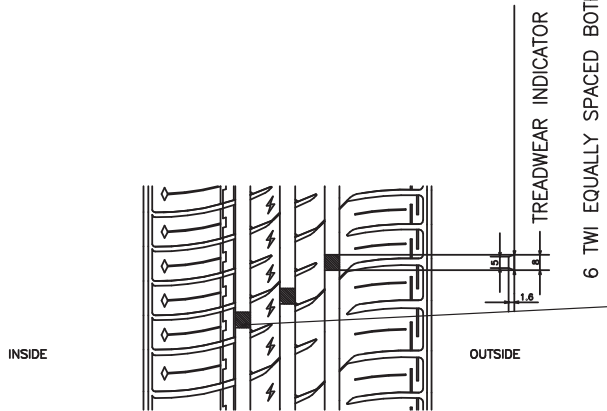

ATREZZO ECO

1	165/70R13 79T	8	ATREZZO
2	MADE IN CHINA	9	DOT 53A3 A25 XXXX (DATE CODE)
3	SAILUN	10	MAX. LOAD 437kg (963LBS) AT 300kPa (44PSI) MAX. PRESS
4	SAFETY WARNING	11	ECO
5	RADIAL TUBELESS	12	TREADWEAR 360 TRACTION A TEMPERATURE A
6	PLIES:TREAD 1POLYESTER+2STEEL SIDEWALL 1POLYESTER	13	OUTSIDE
7	165/70R13	14	INSIDE

TIRE SIZE	A(mm)	B(mm)	C(INCH)	LOAD INDEX SPEED CODE
165/70R13	562	170	5	79T



SCALE : FREE	DATE : 15/08/10	DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED BY	DRAWING NO.	E4-A3A25
SaiLun Group Co., Ltd	-	Wang An	Wang Daidun	Yang Wenzong		TITLE	165/70R13 79T

Tyre size : 165/70R13
Manufacturer : Sailun Group Co., Ltd.

TEST REPORT

according to the ECE-Regulation

Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers

including all amendments until
... ECE-R30, Amend.02, Suppl. 17...

Approval Status

ECE approval : E4-30R-0284634 Ext.00

Structure of the Test Report

Item No.

0. General information
 1. Tested object(s)
 2. Test record
 3. List of appendices
 4. Statement of conformity
-

The Test Report shall be reproduced and published in full by the client only. It shall however be reproduced partially with the written permission of the Testing Laboratory only.



Tyre size : 165/70R13
 Manufacturer : Sailun Group Co., Ltd.

0. General Information

- 0.1. Trade name or mark(s) : SAILUN
- 0.2. Tyre type designation(s) by the manufacturer : ATREZZO ECO
- 0.3. Tyre size designation : 165/70R13
- 0.4. Manufacturer's name and address : Sailun Group Co., Ltd.
 West of Jiangshan Middle Road, Economic &
 Technological Development District, (Hi-tech Industrial
 Park), QINGDAO, China
- 0.5. No. of the information folder : n/a
 -Date of issue : Aug. 25, 2015
 -Date of last change : ---

1. Tested object(s)

- 1.1. Object markings
- Trade name or mark : SAILUN
- Tyre type designation : ATREZZO ECO
- Plies of Tread / Sidewall : 1 POLYESTER + 2 STEEL / 1 POLYESTER
- Tyre size designation : 165/70R13
- Category of use : Normal
- Indication of category of use : n/a
- Structure : radial
- indication / symbol of structure : word "RADIAL", letter "R" in front of rim diameter marking
- Speed category : T
- Load-Capacity Indices(L.I.) : 79
- Word in case of without inner tube : TUBELESS
- Word in case of reinforced tyre : n/a(standard tyre)
- Date of manufacture : 2615
- 1.2. Worst case selection : n/a
- 1.3. Remarks : All versions of the types as stated in the information folder are covered by the tested object(s) respectively.

2. Test record

- 2.1. Equipment for measuring and testing : The test facilities / measurement equipment used were in compliance with the test requirements
- 2.2. Test results



Tyre size : 165/70R13
Manufacturer : Sailun Group Co., Ltd.

Test load (80%)	:	350 kg	
Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	10	10	0 –150
2.	10	20	150
3.	10	30	160
4.	10	40	170
5.	20	60	180

Conditioning after testing : more than 6 hours

Circumference after conditioning, after testing : 1781 mm

Outer diameter : 566.9 mm

Difference outer diameter before and after testing (max. 3.5 %) : 2.9 mm
: 0.51 %

Inspection after test : The tyre does not exhibit tread separation, ply separation, cord separation, chunking or broken cords.

2.3. Additional information : The results of the test refer exclusively to the object(s) mentioned under point 1. of this report.

Test site : Sailun Group Co., Ltd.
West of Jiangshan Middle Road, Economic & Technological Development District, (Hi-tech Industrial Park), QINGDAO, China

Test date : August 22, 2015

2.4. Remarks : ---

3. List of Appendices

Appendix 0 : List of modifications

4. Statement of conformity

The above mentioned information folder and the type described in that comply with the requirements mentioned on page 1. The mentioned test results refer to the object(s) described under point 1.1 of this report.

Engineering centre Shanghai, / Sep. 16, 2015

AY



Andy Yang
 Expert Technical Service



Tyre size : 165/70R13
Manufacturer : Sailun Group Co., Ltd.

List of modifications

Appendix 0

Correction of : ---

Modification of : ---

Addition of : ---

Deletion of : ---

