

APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE ACCORDING TO ECE  
REGULATION No. 30, 02 SERIES OF AMENDMENTS

---

1. Manufacturer's name or trade mark(s) on the tyre type<sup>(2)</sup> : SAILUN;
2. Tyre type designation by the manufacturer<sup>(2)</sup> : ATREZZO ELITE
3. Manufacturer's name and address : Sailun Group Co., Ltd.  
West of Jiangshan Middle Road,  
Economic & Technological Development District,  
(Hi-tech Industrial Park),  
QINGDAO,  
P.R. China
4. If applicable, name and address of the manufacturer's representative : N.A.
5. Summarized description
- 5.1. Tyre size designation : 195/60R15
- 5.2. Category of use : normal/~~snow~~/special use/~~temporary use~~<sup>(1)</sup>
- 5.3. Structure : ~~diagonal/bias belted~~/radial/~~run flat~~ tyre<sup>(1)</sup>
- 5.4. Speed category symbol : V
- 5.5. Load-capacity index : 88
6. Overall dimensions : ETRTO/~~calculated~~/Annex 5
- overall section width : 201
- outer diameter : 615
7. Factor 'x' : 0.70
8. Rims on which the tyre can be mounted : 6J x15
9. Measuring rim and test rim : See attached test report
10. State whether the tyre is : Tubeless /~~tube type~~
11. State whether the tyre is : Standard /~~reinforced~~
12. State if special use tyre : n.a.
- Professional Off-Road : ~~Yes~~ / no
- Tread depth : n.a.
- Void to fill ratio : n.a.
13. Submitted for approval on (date) : Jan.04, 2016

We herewith declare that we have not applied and will not apply for approval with another Contracting Party of the ECE for the same type of product.

MANUFACTURER'S STAMP

Signature :

.....*Gao Min*.....

Name: Gao Min

THIS APPLICATION IS ACCOMPANIED BY:

- A drawing of the tyre's side wall, tread and dimensioned cross section.
- The test report.

(1) Strike out what does not apply.

(2) Modified points are underlined for extension.



THE NETHERLANDS  
(N E D E R L A N D)

## COMMUNICATION

Concerning <sup>(1)</sup>:

- approval granted
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~


of a type of pneumatic tyre for motor vehicles pursuant to Regulation number 30.

**Approval number: E4-30R-0284779****Extension number: 00**

1. Manufacturer's name or trade mark(s) on the tyre type : SAILUN
2. Tyre type designation by the manufacturer : ATREZZO ELITE
3. Manufacturer's name and address : Sailun Group Co., Ltd.  
West of Jiangshan Middle Road, Economic & Technological Development District, (Hi-tech Industrial Park), QINGDAO, P.R. China
4. If applicable, name and address of the manufacturer's representative : not applicable
5. Summarised description
  - 5.1. Tyre size designation : 195/60R15
  - 5.2. Category of use : normal/~~snow/special use/temporary use~~ <sup>(1)</sup>
  - 5.3. Structure : ~~diagonal/bias-belted~~/radial/~~run-flat tyre~~ <sup>(1)</sup>
  - 5.4. Speed category symbol : V
  - 5.5. Load-capacity index : 88
6. Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : TÜV Rheinland Kraftfahrt GmbH  
Technologiezentrum Verkehrssicherheit  
Typprüfstelle Fahrzeuge/Fahrzeugteile  
Am Grauen Stein  
D-51105 Köln (Poll)





7. Date of report issued by that service : January 20, 2016
8. Number of report issued by that service : 86-R30-1299/15-00
9. Reason(s) of extension (if applicable) : Not applicable
10. Any remarks : ---
11. Approval : granted/~~extended/refused/withdrawn~~<sup>(1)</sup>
12. Place : Zoetermeer
13. Date : 09-FEB-2016
14. Signature :

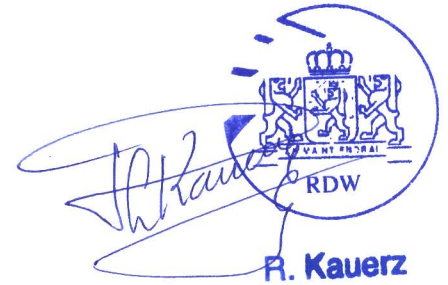


15. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.
  - The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
  - The test report as mentioned in item 8.

---


<sup>(1)</sup> Strike out what does not apply.

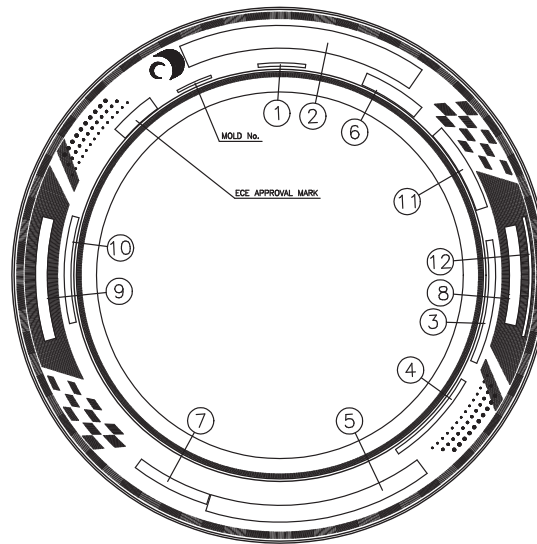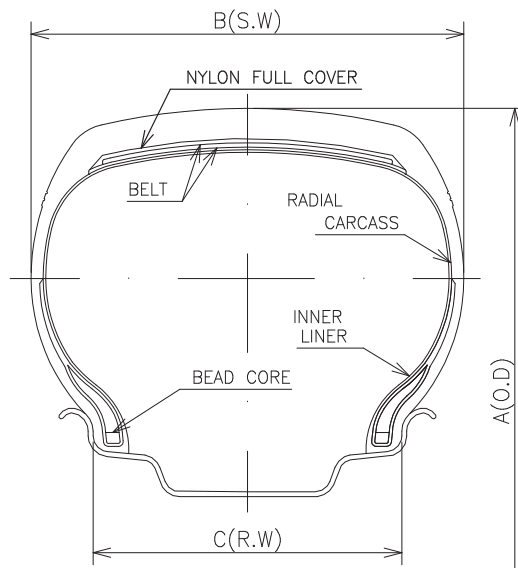

UPPER

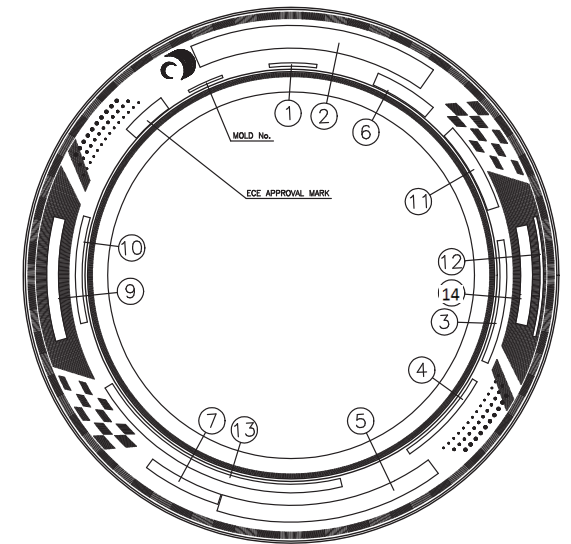


LOWER

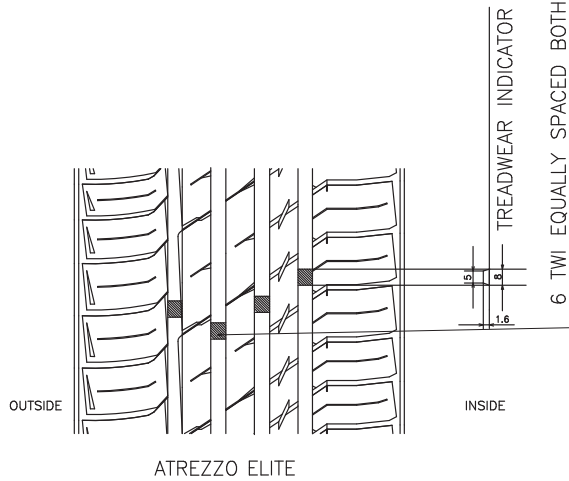

1	MADE IN CHINA	9	195/60R15
2	SAILUN	10	RADIAL TUBELESS
3	195/60R15 88V	11	PLIES:TREAD 1POLYESTER+2STEEL+1NYLON SIDEWALL 1POLYESTER
4	DOT 53B9 A26 XXXX (DATE CODE)		
5	ATREZZO	12	TREADWEAR 360 TRACTION A TEMPERATURE A
6	MAX. LOAD 560kg (1235LBS) AT 300kPa (44PSI) MAX. PRESS	13	SAFETY WARNING
		14	OUTSIDE
7	ELITE		
8	INSIDE		

TIRE SIZE	A(mm)	B(mm)	C(INCH)	LOAD INDEX SPEED CODE	REMARK
195/60R15	615	201	6	88V	



SCALE : FREE	DATE : 15/12/30	DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED BY	DRAWING NO.	E4-B9A26
SaiLun Group Co., Ltd	-	Wana An	Wang Daidma	Yang WanLong		TITLE	195/60R15 88V

Tyre size : 195/60R15  
Manufacturer : Sailun Group Co., Ltd.

---

## TEST REPORT

according to the ECE-Regulation

### Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers

including all amendments until  
... ECE-R30, Amend.02, Suppl. 17...

---

#### Approval Status

ECE approval : E4-30R-0284779 Ext.00

---

#### Structure of the Test Report

##### Item No.

- 0. General information
  - 1. Tested object(s)
  - 2. Test record
  - 3. List of appendices
  - 4. Statement of conformity
- 

The Test Report shall be reproduced and published in full by the client only. It shall however be reproduced partially with the written permission of the Testing Laboratory only.



Tyre size : 195/60R15  
 Manufacturer : Sailun Group Co., Ltd.

## 0. General Information


- 0.1. Trade name or mark(s) : SAILUN
- 0.2. Tyre type designation(s) by the manufacturer : ATREZZO ELITE
- 0.3. Tyre size designation : 195/60R15
- 0.4. Manufacturer's name and address : Sailun Group Co., Ltd.  
 West of Jiangshan Middle Road, Economic &  
 Technological Development District, (Hi-tech Industrial  
 Park), QINGDAO, P.R. China
- 0.5. No. of the information folder : n/a  
 -Date of issue : January 04, 2016  
 -Date of last change : ---

## 1. Tested object(s)

- 1.1. Object markings
- Trade name or mark : SAILUN
- Tyre type designation : ATREZZO ELITE
- Plies of Tread / Sidewall : 1 POLYESTER + 2 STEEL + 1 NYLON /  
 1 POLYESTER
- Tyre size designation : 195/60R15
- Category of use : Normal
- Indication of category of use : n/a
- Structure : radial
- indication / symbol of structure : word "RADIAL", letter "R" in front of rim diameter  
 marking
- Speed category : V
- Load-Capacity Indices(L.I.) : 88
- Word in case of without inner tube : TUBELESS
- Word in case of reinforced tyre : n/a(standard tyre)
- Date of manufacture : 5215
- 1.2. Worst case selection : n/a
- 1.3. Remarks : All versions of the types as stated in the information  
 folder are covered by the tested object(s) respectively.

## 2. Test record

- 2.1. Equipment for measuring and testing : The test facilities / measurement equipment used were in  
 compliance with the test requirements
- 2.2. Test results



Tyre size : 195/60R15  
 Manufacturer : Sailun Group Co., Ltd.

Remarks concerning extension : ~~The type has been tested according to the modification(s) mentioned in appendix 0.~~  
~~An actual practical test of the object was not necessary.~~  
 The results of the previous test(s) are still valid.

## 2.2.1. Dimension measurement according to Annex 6

Measuring rim : 6 J x 15  
 Inflation pressure after mounting on measuring rim : 3.0 bar  
 Inflation pressure before conditioning : 1.8 bar  
 Conditioning of tyre : more than 24 hours  
 Inflation pressure after conditioning : 1.8 bar

Overall width at six equally spaced points				Height of six equally spaced tread wear indicators			
1.	202.2 mm	4.	201.7 mm	1.	2.04 mm	4.	2.05 mm
2.	202.5 mm	5.	202.0 mm	2.	1.91 mm	5.	1.96 mm
3.	201.7 mm	6.	201.7 mm	3.	2.00 mm	6.	1.95 mm
Max.:	202.5 mm						

Circumference : 1932 mm  
 Outer diameter : 615.0 mm  
 Tread depth / void to fill ratio in case of special use tyre : n/a

## 2.2.2. Load/speed performance test according to Annex 7

Test machine : GX-YLSN-1114  
 Diameter of test drum : 1.707 m  
 Test rim : 6 J x 15  
 Inflation pressure before conditioning : 3.0 bar  
 Conditioning of tyre : more than 3 hours  
 Test-room temperature : 24-26 °C  
 Inflation pressure after conditioning : 3.0 bar  
 Circumference before testing : 1936 mm  
 Outer diameter : 616.2 mm  
 Test load (80%×91%) : 408 kg




Tyre size : 195/60R15  
 Manufacturer : Sailun Group Co., Ltd.

Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	10	10	0-200
2.	10	20	200
3.	10	30	210
4.	10	40	220
5.	20	60	230
Conditioning after testing		: more than 6 hours	
Circumference after conditioning, after testing		: 1946 mm	
Outer diameter		: 619.4 mm	
Difference outer diameter before and after testing (max. 3.5 %)		: 3.2 mm : 0.52 %	
Inspection after test		: The tyre does not exhibit tread separation, ply separation, cord separation, chunking or broken cords.	
2.3.	Additional information	: The results of the test refer exclusively to the object(s) mentioned under point 1. of this report.	
	Test site	: Sailun Group Co., Ltd. West of Jiangshan Middle Road, Economic & Technological Development District, (Hi-tech Industrial Park), QINGDAO, P.R. China	
	Test date	: December 31, 2015	
2.4.	Remarks	: ---	
<b>3. List of Appendices</b>			
	Appendix 0	: List of modifications	

**4. Statement of conformity**

The above mentioned information folder and the type described in that comply with the requirements mentioned on page 1. The mentioned test results refer to the object(s) described under point 1.1 of this report.

Engineering centre Shanghai, / January 20, 2016  
 AY / LB



Andy Yang  
 Expert Technical Service



Tyre size : 195/60R15  
Manufacturer : Sailun Group Co., Ltd.

---

**List of modifications**

**Appendix 0**

Correction of : ---

Modification of : ---

Addition of : ---

Deletion of : ---

