

APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE ACCORDING TO ECE  
REGULATION No. 30, 02 SERIES OF AMENDMENTS

---

1. Manufacturer's name or trade mark(s) on the tyre type<sup>(2)</sup> : SAILUN
2. Tyre type designation by the manufacturer<sup>(2)</sup> : ATREZZO ELITE
3. Manufacturer's name and address : Sailun Group Co., Ltd.  
West of Jiangshan Middle Road,  
Economic & Technological Development District,  
(Hi-tech Industrial Park),  
QINGDAO,  
P.R. China
4. If applicable, name and address of the manufacturer's representative : N.A.
5. Summarized description
- 5.1. Tyre size designation : 195/55R15
- 5.2. Category of use : ~~normal~~/~~snow~~/~~special use~~/~~temporary use~~<sup>(1)</sup>
- 5.3. Structure : ~~diagonal~~/~~bias belted~~/~~radial~~/~~run flat tyre~~<sup>(1)</sup>
- 5.4. Speed category symbol : V
- 5.5. Load-capacity index : 85
6. Overall dimensions : ETRTO/~~calculated~~/~~Annex 5~~
- overall section width : 201
- outer diameter : 595
7. Factor 'x' : 0.70
8. Rims on which the tyre can be mounted : 6J x15
9. Measuring rim and test rim : See attached test report
10. State whether the tyre is : Tubeless /~~tube type~~
11. State whether the tyre is : Standard /~~reinforced~~
12. State if special use tyre : n.a.
- Professional Off-Road : ~~Yes~~/~~no~~
- Tread depth : n.a.
- Void to fill ratio : n.a.
13. Submitted for approval on (date) : Sept 22, 2015

We herewith declare that we have not applied and will not apply for approval with another Contracting Party of the ECE for the same type of product.

MANUFACTURER'S STAMP

Signature :

.....*Gao Min*.....

Name: Gao Min

THIS APPLICATION IS ACCOMPANIED BY:

- A drawing of the tyre's side wall, tread and dimensioned cross section.
- The test report.

(1) Strike out what does not apply.

(2) Modified points are underlined for extension.




**THE NETHERLANDS**  
(N E D E R L A N D)**COMMUNICATION**Concerning <sup>(1)</sup>:

- approval granted
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of pneumatic tyre for motor vehicles pursuant to Regulation number 30.



**Approval number: E4-30R-0284777****Extension number: 00**

1. Manufacturer's name or trade mark(s) : SAILUN  
on the tyre type
2. Tyre type designation by the manufacturer : ATREZZO ELITE
3. Manufacturer's name and address : Sailun Group Co., Ltd.  
West of Jiangshan Middle Road,  
Economic & Technological Development  
District, (Hi-tech Industrial Park), QINGDAO,  
CHINA
4. If applicable, name and address of the manufacturer's representative : not applicable
5. Summarised description
- 5.1. Tyre size designation : 195/55R15


- 5.2. Category of use : normal/~~snow/special use/temporary use~~<sup>(1)</sup>
- 5.3. Structure : ~~diagonal/bias belted/radial/run flat tyre~~<sup>(1)</sup>
- 5.4. Speed category symbol : V
- 5.5. Load-capacity index : 85
6. Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : TÜV Rheinland Kraftfahrt GmbH  
Technologiezentrum Verkehrssicherheit  
Typprüfstelle Fahrzeuge/Fahrzeugteile  
Am Grauen Stein  
D-51105 Köln (Poll)
7. Date of report issued by that service : Feb. 04, 2016
8. Number of report issued by that service : 86-R30-1297/15-00
9. Reason(s) of extension (if applicable) : Not applicable
10. Any remarks : ---
11. Approval : ~~granted/extended/refused/withdrawn~~<sup>(1)</sup>
12. Place : Zoetermeer
13. Date : 25-FEB-2016
14. Signature :   
H. de Louweren
15. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.  
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.  
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.  
- The test report as mentioned in item 8.

---


<sup>(1)</sup> Strike out what does not apply.

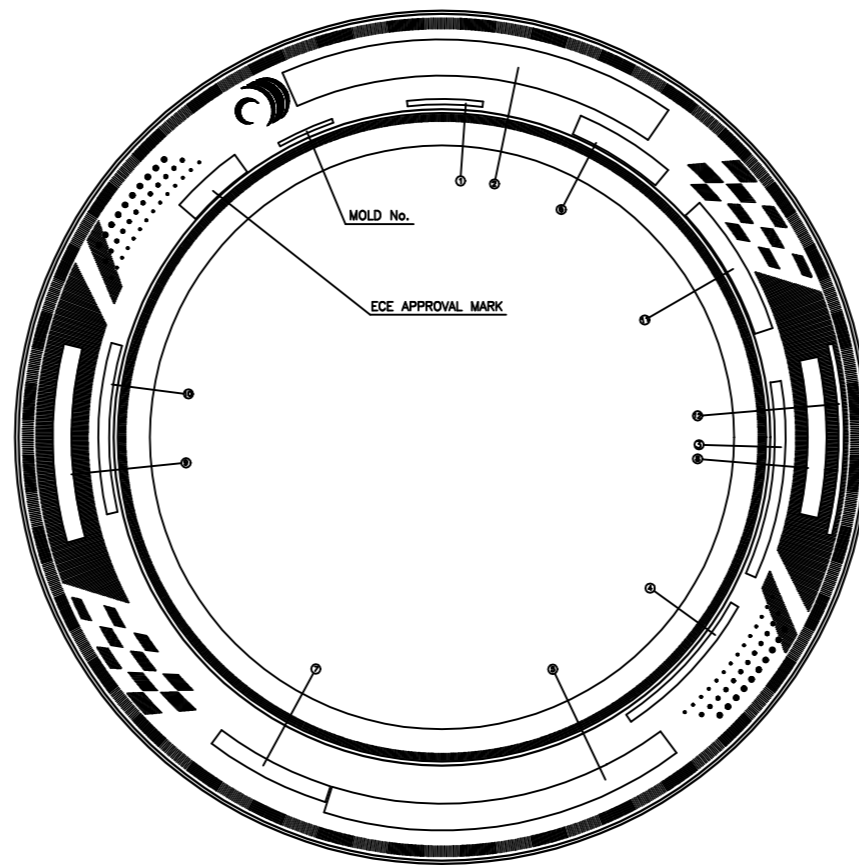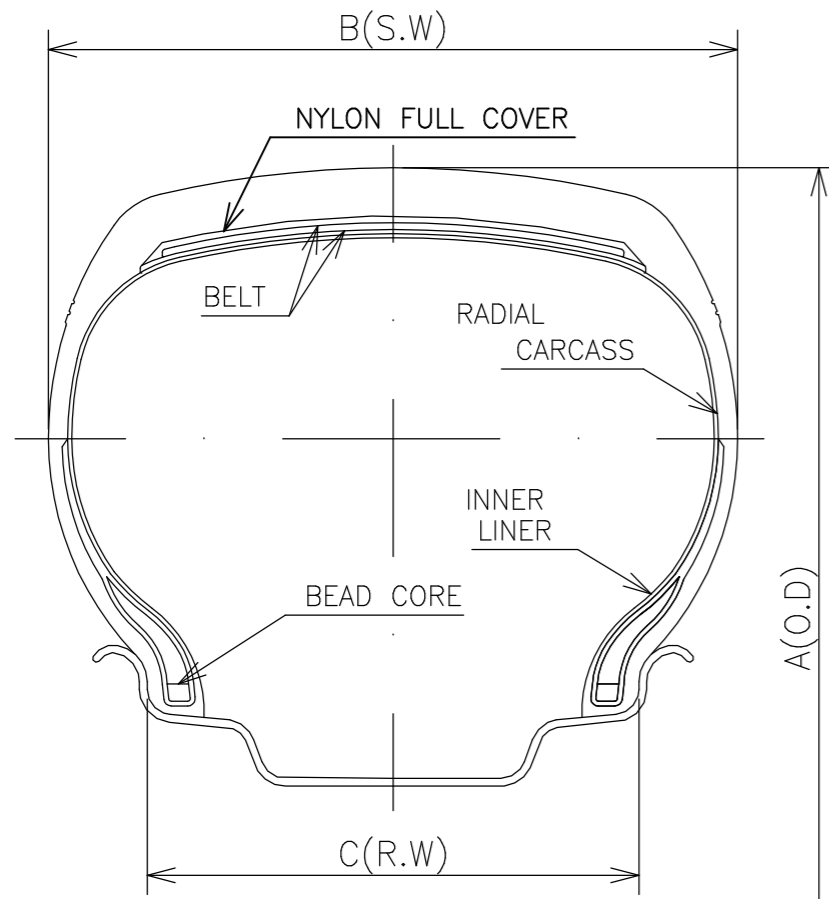

UPPER

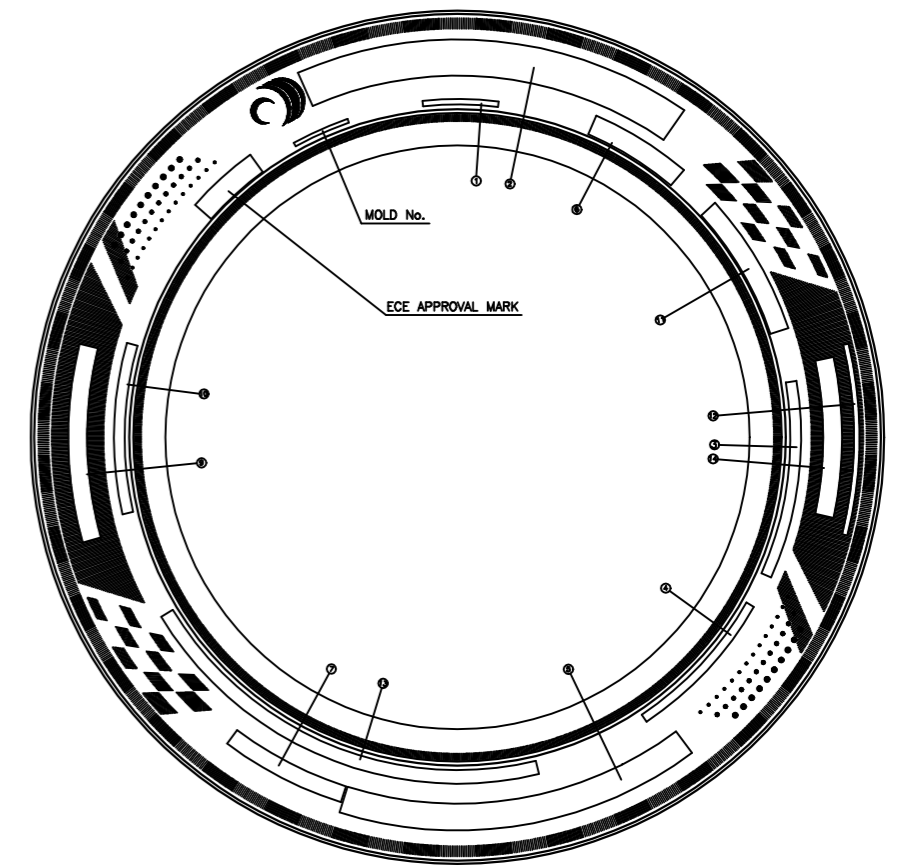

LOWER

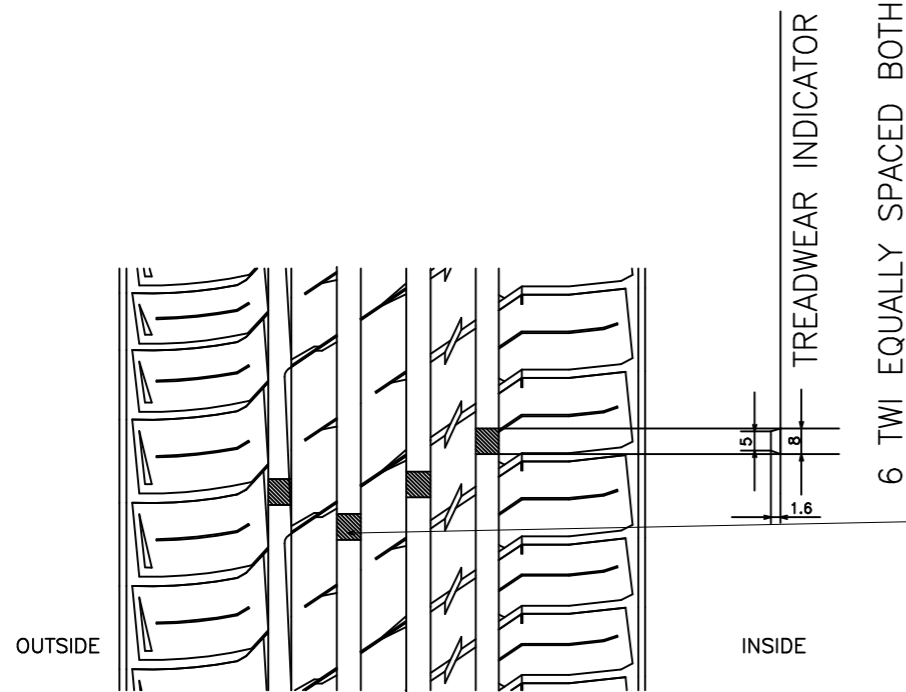

ATREZZO ELITE

1	MADE IN CHINA	9	195/55R15
2	SAILUN	10	RADIAL TUBELESS
3	195/55R15 85V	11	PLIES:TREAD 1POLYESTER+2STEEL+1NYLON SIDEWALL 1POLYESTER
4	DOT 53AU A26 XXXX (DATE CODE)		
5	ATREZZO	12	TREADWEAR 360 TRACTION A TEMPERATURE A
6	MAX. LOAD 515kg (1135LBS) AT 300kPa (44PSI) MAX. PRESS	13	SAFETY WARNING
		14	OUTSIDE
7	ELITE		
8	INSIDE		

TIRE SIZE	A(mm)	B(mm)	C(INCH)	LOAD INDEX SPEED CODE	REMARK
195/55R15	595	201	6.0	85V	

SCALE : FREE	DATE : 15/11/5	DESIGNED BY	DRAWN BY	CHECKED BY	APPROVED BY	DRAWING NO.	E4-AUA26
SaiLun Group Co., Ltd	-	Wang An	Wang Daima	Yang Wanlong		TITLE	195/55R15 85V



Type : 195/55R15  
Manufacturer : Sailun Group Co., Ltd.

---

## TEST REPORT

according to UNECE-Regulation

### Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers

#### ECE-R30

including all amendments until  
Amend.02, Suppl. 17

---

Approval Status

UNECE approval : E4-30R-0284777 Ext.00

---

Structure of the Test Report

Item No.

0. General information
  1. Tested ~~vehicle(s)~~ / object(s)
  2. Test record
  3. List of appendices
  4. Statement of conformity
- 

The Test Report shall be reproduced and published in full by the client only. It shall however be reproduced partially with the written permission of the Testing Laboratory only.



Type : 195/55R15  
 Manufacturer : Sailun Group Co., Ltd.

**0. General Information**

- 0.1. Make (trade name of the manufacturer) : Sailun Group Co., Ltd.
- 0.2. Type : 195/55R15
- 0.3. Category of vehicle : Not applicable
- 0.4. Name and address of the manufacturer : Sailun Group Co., Ltd.  
 West of Jiangshan Middle Road,  
 Economic & Technological Development District,(Hi-tech Industrial Park),QINGDAO, CHINA
- 0.5. No. of the information folder : Not applicable
  - Date of issue : Sep. 22, 2015
  - Date of last change : ---

**1. Tested vehicle(s) / object(s)**

- 1.1 Description
  - 1.1.1. ~~Vehicle~~ / object
    - Commercial description : Not applicable
    - Type(s) / ~~variant(s)~~ / ~~version(s)~~ : 195/55R15
    - Identification number : See Appendix 1
  - 1.1.2. Condition of ~~vehicle(s)~~/Object(s) : New / ~~used~~ / ~~pretested~~
- 1.2. Worst case selection : The determination of the worst case was done according to internal procedures of the Technical Service (QMA 1.301.005, section 6.2.2.2.).
- 1.3. Remarks : Not applicable



Type : 195/55R15  
 Manufacturer : Sailun Group Co., Ltd.

2. Test record

- 2.1. Equipment for measuring and testing : The test facilities / measurement equipment used were in compliance with the test requirements
- 2.1.1. Specifications for the test site : Not applicable
- 2.1.2. Subcontracting : Not applicable
- 2.2. Test results : See Appendix 1  
 Numbering according to Paragraph 6. and 7. of the UNECE-R30
- 2.2.1. Test results referring to measurements : Pass / ~~Fail~~
- 2.2.2. Attributive tests : Not applicable
- 2.2.3. Alternative test provisions : Not applicable
- Remarks concerning extension : ~~The type has been tested according to the modification(s) mentioned in appendix 0.~~  
 The new parts meet the requirements of the regulation.  
 An actual practical test of the type was not necessary.  
 The results of the previous test(s) are still valid.
- 2.3. Additional information : The results of the test refer exclusively to the object(s) mentioned under point 1. of this report.
- Test site : Sailun Group Co., Ltd.  
 West of Jiangshan Middle Road,  
 Economic & Technological Development District,  
 (Hi-tech Industrial Park), QINGDAO, CHINA
- Test date : Nov. 12, 2015
- 2.4. Remarks : Not applicable



Type : 195/55R15  
Manufacturer : Sailun Group Co., Ltd.

---

### 3. List of Appendices

Appendix 0 : List of modifications  
Appendix 1 : Test minutes

### 4. Statement of conformity

The in point 0.5. mentioned information folder and the type described in that comply with the requirements mentioned on page 1.

With regard to the required level of performance to be achieved, the tested items were representative for the type to be approved (see point 1.2).

The mentioned test results refer to the vehicle(s)/object(s) described under point 1.1 of this report.

Engineering Centre Shanghai, / Feb. 04, 2016  
AY



Andy Yang  
Expert Technical Service





Type : 195/55R15  
Manufacturer : Sailun Group Co., Ltd.

---

List of modifications

Appendix 0

Correction of : ---  
Modification of : ---  
Addition of : ---  
Deletion of : ---



Type : 195/55R15  
 Manufacturer : Sailun Group Co., Ltd.

Test minutes

Appendix 1

1. Test data

1.1. Test object(s) markings

- 1.1.1 Trade name or mark : SAILUN
- 1.1.2 Tyre type designation : ATREZZO ELITE
- 1.1.3 Plies of Tread / Sidewall : 1 POLYESTER + 2 STEEL + 1 NYLON / 1 POLYESTER
- 1.1.4 Tyre size designation : 195/55R15
- 1.1.5 Category of use : Normal  
 Indication of category of use : n/a
- 1.1.6 Structure : Radial  
 Indication / symbol of structure : Word "RADIAL", letter "R" in front of rim diameter marking
- 1.1.7 Speed category : V
- 1.1.8 Load-Capacity Indices(L.I.) : 85
- 1.1.9 Word in case of without inner tube : TUBELESS
- 1.1.10 Word in case of reinforced tyre : n/a (Standard tyre)
- 1.1.11 Date of manufacture : 4315

1.2. Dimension measurement according to Annex 6

- 1.2.1 Measuring rim : 6.0 J x 15
- 1.2.2 Inflation pressure after mounting on measuring rim : 3.0 bar
- 1.2.3 Inflation pressure adjusted before conditioning : 1.8 bar
- 1.2.4 Conditioning of tyre : More than 24 hours
- 1.2.5 Inflation pressure readjusted after conditioning : 1.8 bar

1.2.6 Overall width at six equally spaced points	Height of six equally spaced tread wear indicators						
1.	199.5 mm	4.	200.0 mm	1.	1.89 mm	4.	1.92 mm
2.	199.5 mm	5.	200.0 mm	2.	1.96 mm	5.	1.87 mm
3.	199.8 mm	6.	199.9 mm	3.	1.96 mm	6.	1.93 mm
Max.:	200.0 mm						



Type : 195/55R15  
 Manufacturer : Sailun Group Co., Ltd.

- 1.2.7 Circumference : 1870 mm
- 1.2.8 Outer diameter : 595.2 mm
- 1.2.9 Tread depth / void to fill ratio in case of special use tyre : Not applicable

**1.3. Load/speed performance test according to Annex 7**

- 1.3.1 Test machine : L-4NG-360
- 1.3.2 Diameter of test drum : 1.707 m
- 1.3.3 Test rim : 6.0 J x 15
- 1.3.4 Inflation pressure adjusted before conditioning : 3.0 bar
- 1.3.5 Conditioning of tyre : More than 3 hours
- 1.3.6 Test-room temperature : 25 ~ 28 °C
- 1.3.7 Inflation pressure readjusted after conditioning : 3.0 bar
- 1.3.8 Circumference after conditioning, before testing : 1873 mm
- 1.3.9 Outer diameter after conditioning, before testing : 596.2 mm
- 1.3.10 Test load (80% x 91%) : 375 kg

Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	10	10	0 – 200
2.	10	20	200
3.	10	30	210
4.	10	40	220
5.	20	60	230

- 1.3.11 Conditioning after testing : More than 6 hours
- 1.3.12 Circumference after conditioning, after testing : 1884 mm
- 1.3.13 Outer diameter after conditioning, after testing : 599.7 mm
- 1.3.14 Difference outer diameter before and after testing (max. 3.5 %) : 3.5 mm  
: 0.59 %
- 1.3.15 Inspection after test : The tyre does not exhibit tread separation, ply separation, cord separation, chunking or broken cords.

**2. Remarks** : ---

